turbodevil

Our new turbodevil floor cleaner series



turbodevil - the new generation



Especially smooth


running and stainless

turbodevil

Especially designed for professional cleaning applications.

- Completely stainless design.
- Suitable for hot and cold water high pressure pumps.
- Heat-resistant all around protection ensures a safe handling by protection against splashes and stones.
 - The precision rotor arm is counterbalanced, precisely equilibrated and welded by robots. Guaranteed low vibration & reliable running.
- Suitable for applications up to about 150 hours anual operation hours.
- Swivels are equipped with reinforced, selflubricating triple bearing made out of stainless steel as developed with a hard metal sealing system for high revolutions per minute.







quality, 3-bearing swivel joint with ceramic sealing elements for high durability and extremely long stress.

industrial cleaning applications.

Castors made of stainless steel.

To optimally adapt the surface cleaner to the high pressure cleaner, nozzles are excluded. Nozzles with 1/4" M are required.

> All surface cleaner are packed separately.



turbodevil – the new generation







turbodevil

Swivel for high revolutions with pivoting inlet










3 or 4 industrial castors (60 mm): Easy and flexible steering





Swivel: With triple bearing system



Surface cleaner TD 300 & TD 410

Surface cleaner with a newly developed swivel with pivoting inlet for high revolutions per minute. The bending of the swivel is variably adjustable thus making an easy cleaning of floors and walls possible. 3 industrial castors (60 mm). 2 nozzles 1/4" M are required. Max. 1800 l/h / 120 $^{\circ}$ C

R+M Nr.	Ø	E	P
521 030 300	300 mm	1/4" IG	max. 275 bar
521 042 300	410 mm	1/4" IG	max. 275 bar

Surface cleaner TD 520

Surface cleaner with foldable handle bar for space saving and reasonable transport. Swivel with triple bearing system. 4 industrial castors (60 mm). 2 nozzles 1/4" M are required. Max. 2400 l/h / 120 °C

R+M Nr.	Ø	E	P
521 052 300	520 mm	1/4" IG	max. 275 bar

Accessories for TD 300 & TD 410



Lance ST-007. 1/4" M: Plug KW. Stainless steel 1000 mm

R+M Nr.	
512 495 90	

Lance extension. 1/4" M: M22 M.	
Stainless steel 500 mm	

Stainless steel 500 mm		
R+M Nr.		
513 129		

R+M Nr.	
519 70	

turbodevil - INDUSTRIAL



Surface cleaner TDI 410 INDUSTRIAL

Surface cleaner with a newly developed swivel with pivoting inlet for high revolutions per minute. The bending of the swivel is variably adjustable thus making an easy cleaning of floors and walls possible. 3 industrial castors (60 mm). 2 nozzles 1/4" M are required. Max. $1800 \, l/h / 120 \, ^{\circ}C$

		•	
R+M Nr.	Ø	E	P
521 042 400	410 mm	1/4" IG	max. 275 bar

Surface cleaner TDI 520 INDUSTRIAL

Surface cleaner with foldable handle bar for space saving and reasonable transport. High performance swivel, stainless steel.

4 industrial castors (60 mm). 2 nozzles 1/4" M are required. Max. 2400 l/h / 120 $^{\circ}$ C

R+M Nr.	Ø	E	Р
521 052 400	520 mm	1/4" IG	max. 275 bar



4 large industry castors: To move with ease

Precision rotor:Welded by robots



Surface cleaner TDI 750 INDUSTRIAL


All stainless steel. With reinforced hood and divisble fork. High performance swivel, stainless steel. Precision rotor arm welded by robots. 4 industrial castors (100 mm). 3 nozzles 1/4" M are required. Max. 2400 l/h / 120 °C


R+M Nr.	Ø	Œ	Р
521 075 300	750 mm	1/4" IG	max. 275 bar

turbodevil - agriculture-cleaner Big Wheel



The choice of perfection

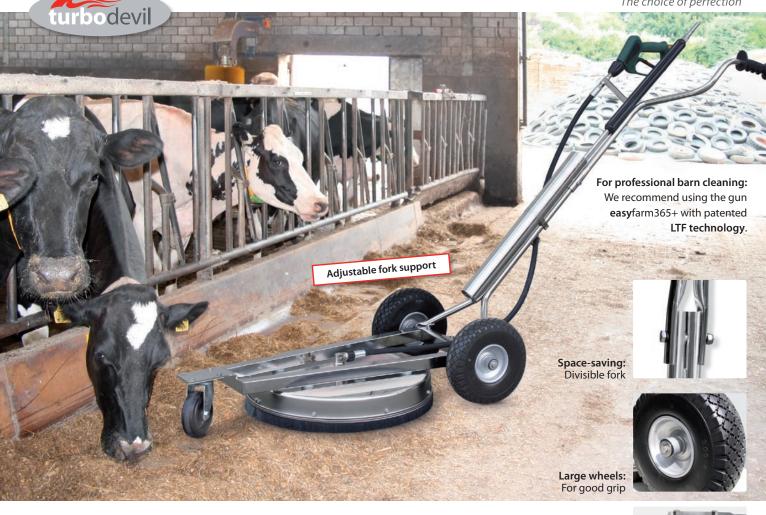



- Solid stainless steel design with reinforcements for demanding use in agriculture.
- Front-mounted castor in 30 mm width, is ideal for driving on slatted floors and allows easy and flexible steering.
- Connection to the rotating arm via a reinforced hinge with carbide sealings.
- The set-back arrangement of the stable fork allows for easy cleaning under obstacles such as tables or fences.
- 2 very large, foam-filled rear tires allow to go up stairs rearwards.
- Gun and lance with nozzle are not included.
- 2 nozzles 1/4" M are required.
- Max. 1800 l/h / 120 °C

Carefully choosen
With 30 mm wel
equipped for
slatted floors



Lug: The underside of the connecting tube remains on the handle





Extra robust: Swivel with carbide sealings

Clean solution: Extra thick

rubber bristles for





R+M Nr.	Ø	©	P
521 052 900	520 mm	1/4" IG	max. 275 bar

Always at hand: Lance holder for attachement to the fork